



# UNITAP™ Products



3233 W Hunting Park Avenue, Philadelphia PA 19132-1845  
(800) 79-ROYAL (215) 221-1200 fax (215) 221-1201  
advisors@royalelectric.com www.royalelectric.com

**WE GET IT**  
24/7 Emergency Material Access

## **Contents**

<b>NEW Direct Burial/Submersible UNITAP™ Connectors</b>	<b>2</b>
<b>Utility-Grade Submersible UNITAP™ Connectors</b>	<b>2</b>
<b>MOLE™ In-Line Splice/Reducer</b>	<b>3</b>
<b>Clear UNITAP™ Inspectable, Insulated Multiple Tap Connectors</b>	<b>3</b>
<b>Mounting Version for UNITAP™ Connector Line</b>	<b>6</b>
<b>UV-Rated Black UNITAP™ Connectors</b>	<b>7</b>

# UNITAP™ Connectors

The UNITAP™ line of connectors makes inspectable, insulated multiple tap connectors for tap connections and in-line splice/reductions quick and easy.

## NEW Direct Burial/Submersible UNITAP™ Connectors

Designed specifically for direct burial applications.

- UL 486D Listed and CSA Certified
- Provide a convenient way to join multiple conductors in direct burial applications
- Insulated with EPDM rubber
- Can be used for any application that requires a water-tight or below-grade application



## Utility-Grade Submersible UNITAP™ Connectors

Black plastisol-covered AL6061-T6 aluminum body ensures conductivity and strength.

- ANSI C119.1, ANSI C119.4 and Western Underground Committee Guide 2.5
- Fully tested to ANSI C119.4 for Class A connectors



## MOLE™ In-Line Splice/Reducer

Tailored exclusively for direct burial applications and UL 486D Listed, the MOLE™ In-Line Splice/Reducer is made with a specialized material that forms a water-tight connection and is rugged enough to withstand abrasions that may occur in direct-burial situations.



## Clear UNITAP™ Connectors

UL 486B Listed and CSA Certified, Clear UNITAP™ is Dual Rated AL9CU for stranded copper or aluminum applications.

- 600 volt
- 90°C



## Insulated Multiple Tap Connectors

Time-saving advantages:

- Pre-filled with oxide inhibitor
- Pre-insulated for faster installation
- Contaminant-free due to solid end caps
- Range-taking (reduced need for connector inventory)
- Dual Rated AL9CU for copper and aluminum applications
- Multiple configurations accommodate a variety of applications



## Mounting Version for UNITAP™ Connector Line

The UNITAP™ mounting version is outfitted with two isolated mounting holes, which can hold up to ¼" standard hardware. These holes, located at both ends of the connector, allow for direct mounting to trough, gutter or wire way.




## UV-Rated Black UNITAP™ Connectors

UV-rated, black plastisol-covered AL6061-T6 aluminum body saves time by eliminating the need for taping.



- UL 486B Listed
- Dual Rated AL9CU
- 600 volt
- 90°C



## NEW Direct Burial/Submersible UNITAP™ Connectors

	Catalog #	# of Ports	Wire Range (AWG/kcmil)	Length	Width	Height	Hex Key
<b>Direct Burial/Submersible UNITAP™ Connector</b> 	BIBS3502DB	2	350-12	2.61	4.06	2.46	5/16
	BIBS3503DB	3	350-12	3.82	4.06	2.46	5/16
	BIBS3504DB	4	350-12	5.03	4.06	2.46	5/16
	BIBS3505DB	5	350-12	6.24	4.06	2.46	5/16
	BIBS3506DB	6	350-12	7.45	4.06	2.46	5/16
	BIBS5003DB	3	500-10	4.31	4.58	3.13	5/16
	BIBS5004DB	4	500-10	5.69	4.58	3.13	5/16
	BIBS5005DB	5	500-10	7.06	4.58	3.13	5/16
	BIBS5006DB	6	500-10	8.44	4.58	3.13	5/16
<b>In-Line Splice/Reducer</b>	UGS350ULDB	2	350-12	8.50	1.50	2.81	5/16

## Utility-Grade Submersible UNITAP™ Connectors

	Catalog #	Number of Outlets	Wire Range (Aluminum or Copper)	Length	Width	Height
<b>Overhead or Underground Secondary Connectors</b> 	BSSBC750-2-1	3	2 - 750	4.57	8.50	3.07
	BSSBC750-3-1	4	2 - 750	6.13	8.50	3.07
	BSSBC750-4-1	5	2 - 750	7.69	8.50	3.07
	BSSBC750-4-2	6	2 - 750	9.25	8.50	3.07
	BSSBC750-6-2	8	2 - 750	10.81	8.50	3.07
<b>Overhead or Underground Secondary Connectors</b> 	BSSBC750-3	3	2 - 750	4.57	5.42	3.07
	BSSBC750-4	4	2 - 750	6.13	5.42	3.07
	BSSBC750-5	5	2 - 750	7.69	5.42	3.07
	BSSBC750-6	6	2 - 750	9.25	5.42	3.07
	BSSBC750-7	7	2 - 750	10.81	5.42	3.07
	BSSBC750-8	8	2 - 750	12.37	5.42	3.07
	BDESS750-3	6	2 - 750	4.57	8.15	3.07
	BDESS750-4	8	2 - 750	6.13	8.15	3.07
	BDESS750-5	10	2 - 750	7.69	8.15	3.07
	BDESS750-6	12	2 - 750	9.25	8.15	3.07
	BDESS750-7	14	2 - 750	10.81	8.15	3.07
	BDESS750-8	16	2 - 750	12.31	8.15	3.07

UNITAP™ connectors are rated for code conductor only.

## MOLE™ In-Line Splice/Reducer

	Catalog #	# of Ports	Wire Range (AWG/kcmil)	Length	Width	Height	Hex Key (Torque in-lbs)	Wire Strip Length
<b>MOLE™ In-Line Splice/Reducer</b> For Direct Burial	BISR4-DB	2	#6 - 4 AWG	4.30	0.80	1.28	1/8 (50)	7/8
	BISR1-DB	2	#2 - 1 AWG	6.30	0.93	1.59	5/32 (130)	1-3/32
	BISR3/0-DB	2	1/0 - 3/0 AWG	6.25	0.99	1.84	3/16 (220)	1-3/32
	BISR250-DB	2	4/0 - 250 kcmil	6.70	1.18	2.03	5/16 (360)	1-5/16

## Clear UNITAP™ Inspectable, Insulated Multiple Tap Connectors



	Catalog #	# of Ports	Wire Range (AWG/kcmil)	Length	Width	Height	Hex Key (Torque in-lbs)
<b>BIT, BISR</b> <b>TWO-PORT</b> Single-Sided or Double-Sided Entry	BIT4	2	#14 - #4	1.16	1.16	1.25	1/8 (45)
	BIT04	2	#14 - #4	1.16	1.50	1.25	1/8 (45)
	BIT2/0	2	#14 - 2/0	1.52	1.40	1.38	3/16 (120)
	BIT02/0	2	#14 - 2/0	1.52	1.56	1.38	3/16 (120)
	BIT250	2	#10 - 250	2.03	2.07	2.13	5/16 (275)
	BIT0250	2	#10 - 250	2.03	2.64	2.13	5/16 (275)
	BIT350	2	#10 - 350	2.22	2.32	2.50	5/16 (275)
	BIT0350	2	#10 - 350	2.22	3.00	2.50	5/16 (275)
	BIT600	2	#4 - 600	2.72	2.38	2.75	3/8 (375)
	BIT0600	2	#4 - 600	2.72	3.00	2.75	3/8 (375)
	BIT750*	2	#2 - 750	2.87	2.70	3.00	3/8 (375)
BIT0750*	2	#2 - 750	2.87	3.38	3.00	3/8 (375)	
<b>In-Line Splice/Reducer</b>	BISR2	2	#14 - 2	2.38	0.75	1.22	5/32 (100)
	BISR1/0	2	#14 - 1/0	2.91	0.91	1.38	3/16 (120)
	BISR250	2	#10 - 250	4.01	1.19	2.10	5/16 (275)
	BISR350	2	#10 - 350	4.63	1.34	2.35	5/16 (275)
	BISR500	2	#6 - 500	5.00	1.62	2.62	3/8 (375)

	Catalog #	# of Ports	Wire Range (AWG/kcmil)	Length	Width	Height	Hex Key (Torque in-lbs)
<b>BIBD</b> <b>MULTI-PORT</b> Double-Sided Entry <i>(continued on next page)</i>	BIBD4-2	2	#14 - #4	1.16	1.50	1.25	1/8 (45)
	BIBD4-3	3	#14 - #4	1.59	1.50	1.25	1/8 (45)
	BIBD4-4	4	#14 - #4	2.03	1.50	1.25	1/8 (45)
	BIBD4-5	5	#14 - #4	2.47	1.50	1.25	1/8 (45)
	BIBD4-6	6	#14 - #4	2.91	1.50	1.25	1/8 (45)
	BIBD4-8	8	#14 - #4	3.78	1.50	1.25	1/8 (45)

\*Not UL Listed

UNITAP™ connectors are rated for code conductor only.



## Clear UNITAP™ Inspectable, Insulated Multiple Tap Connectors

	Catalog #	# of Ports	Wire Range (AWG/kcmil)	Length	Width	Height	Hex Key (Torque in-lbs)
<b>BIBD</b> <b>MULTI-PORT</b> <b>Double-Sided Entry</b> <i>(continued from previous page)</i>  	BIBD2/0-2	2	#14 - 2/0	1.52	1.56	1.25	3/16 (120)
	BIBD2/0-3	3	#14 - 2/0	2.19	1.56	1.25	3/16 (120)
	BIBD2/0-4	4	#14 - 2/0	2.86	1.56	1.25	3/16 (120)
	BIBD2/0-5	5	#14 - 2/0	3.53	1.56	1.25	3/16 (120)
	BIBD2/0-6	6	#14 - 2/0	4.20	1.56	1.25	3/16 (120)
	BIBD2/0-8	8	#14 - 2/0	5.55	1.56	1.25	3/16 (120)
	BIBD2/0-10	10	#14 - 2/0	6.89	1.56	1.25	3/16 (120)
	BIBD2/0-12	12	#14 - 2/0	8.24	1.56	1.25	3/16 (120)
	BIBD2/0-14	14	#14 - 2/0	9.58	1.56	1.25	3/16 (120)
	BIBD250-2	2	#10 - 250	2.03	2.64	2.13	5/16 (275)
	BIBD250-3	3	#10 - 250	2.97	2.64	2.13	5/16 (275)
	BIBD250-4	4	#10 - 250	3.91	2.64	2.13	5/16 (275)
	BIBD250-5	5	#10 - 250	4.84	2.64	2.13	5/16 (275)
	BIBD250-6	6	#10 - 250	5.78	2.64	2.13	5/16 (275)
	BIBD250-8	8	#10 - 250	7.66	2.64	2.13	5/16 (275)
	BIBD250-10	10	#10 - 250	9.53	2.64	2.13	5/16 (275)
	BIBD250-12	12	#10 - 250	11.41	2.64	2.13	5/16 (275)
	BIBD250-14	14	#10 - 250	13.29	2.64	2.13	5/16 (275)
	BIBD350-2	2	#10 - 350	2.22	3.00	2.50	5/16 (275)
	BIBD350-3	3	#10 - 350	3.13	3.00	2.50	5/16 (275)
	BIBD350-4	4	#10 - 350	4.04	3.00	2.50	5/16 (275)
	BIBD350-5	5	#10 - 350	4.95	3.00	2.50	5/16 (275)
	BIBD350-6	6	#10 - 350	5.86	3.00	2.50	5/16 (275)
	BIBD350-8	8	#10 - 350	7.68	3.00	2.50	5/16 (275)
	BIBD350-10	10	#10 - 350	9.50	3.00	2.50	5/16 (275)
	BIBD350-12	12	#10 - 350	11.32	3.00	2.50	5/16 (275)
	BIBD350-14	14	#10 - 350	13.14	3.00	2.50	5/16 (275)
	BIBD600-2	2	#4 - 600	2.56	3.00	2.75	3/8 (375)
	BIBD600-3	3	#4 - 600	3.77	3.00	2.75	3/8 (375)
	BIBD600-4	4	#4 - 600	4.97	3.00	2.75	3/8 (375)
	BIBD600-5	5	#4 - 600	6.17	3.00	2.75	3/8 (375)
	BIBD600-6	6	#4 - 600	7.37	3.00	2.75	3/8 (375)
	BIBD600-8	8	#4 - 600	9.78	3.00	2.75	3/8 (375)
	BIBD600-10	10	#4 - 600	12.97	3.00	2.75	3/8 (375)
	BIBD600-12	12	#4 - 600	15.53	3.00	2.75	3/8 (375)
BIBD600-14	14	#4 - 600	18.09	3.00	2.75	3/8 (375)	
BIBD750-2*	2	#2 - 750	2.87	3.38	3.00	3/8 (375)	
BIBD750-3*	3	#2 - 750	4.25	3.38	3.00	3/8 (375)	
BIBD750-4*	4	#2 - 750	5.63	3.38	3.00	3/8 (375)	
BIBD750-6*	6	#2 - 750	8.37	3.38	3.00	3/8 (375)	
BIBD750-8*	8	#2 - 750	11.13	3.38	3.00	3/8 (375)	
BIBD750-10*	10	#2 - 750	13.87	3.38	3.00	3/8 (375)	
BIBD750-12*	12	#2 - 750	16.63	3.38	3.00	3/8 (375)	
BIBD750-14*	14	#2 - 750	19.37	3.38	3.00	3/8 (375)	

\*Not UL Listed

UNITAP™ connectors are rated for code conductor only.


## Clear UNITAP™ Inspectable, Insulated Multiple Tap Connectors

	Catalog #	# of Ports	Wire Range (AWG/kcmil)	Length	Width	Height	Hex Key (Torque in-lbs)
<b>BIBS</b> <b>MULTI-PORT</b> <b>Single-Sided Entry</b>    	BIBS4-3	3	#14 - 4	1.59	1.25	1.25	1/8 (45)
	BIBS4-4	4	#14 - 4	2.03	1.25	1.25	1/8 (45)
	BIBS4-5	5	#14 - 4	2.47	1.25	1.25	1/8 (45)
	BIBS4-6	6	#14 - 4	2.91	1.25	1.25	1/8 (45)
	BIBS4-8	8	#14 - 4	3.78	1.25	1.25	1/8 (45)
	BIBS2/0-3	3	#14 - 2/0	2.19	1.31	1.38	3/16 (120)
	BIBS2/0-4	4	#14 - 2/0	2.86	1.31	1.38	3/16 (120)
	BIBS2/0-5	5	#14 - 2/0	3.53	1.31	1.38	3/16 (120)
	BIBS2/0-6	6	#14 - 2/0	4.20	1.31	1.38	3/16 (120)
	BIBS2/0-8	8	#14 - 2/0	5.55	1.31	1.38	3/16 (120)
	BIBS2/0-10	10	#14 - 2/0	6.89	1.31	1.38	3/16 (120)
	BIBS2/0-12	12	#14 - 2/0	8.24	1.31	1.38	3/16 (120)
	BIBS2/0-14	14	#14 - 2/0	9.58	1.31	1.38	3/16 (120)
	BIBS250-3	3	#10 - 250	2.97	2.07	2.13	5/16 (275)
	BIBS250-4	4	#10 - 250	3.91	2.07	2.13	5/16 (275)
	BIBS250-5	5	#10 - 250	4.84	2.07	2.13	5/16 (275)
	BIBS250-6	6	#10 - 250	5.78	2.07	2.13	5/16 (275)
	BIBS250-8	8	#10 - 250	7.66	2.07	2.13	5/16 (275)
	BIBS250-10	10	#10 - 250	9.53	2.07	2.13	5/16 (275)
	BIBS250-12	12	#10 - 250	11.41	2.07	2.13	5/16 (275)
	BIBS250-14	14	#10 - 250	13.29	2.07	2.13	5/16 (275)
	BIBS350-3	3	#10 - 350	3.13	2.32	2.50	5/16 (275)
	BIBS350-4	4	#10 - 350	4.04	2.32	2.50	5/16 (275)
	BIBS350-5	5	#10 - 350	4.95	2.32	2.50	5/16 (275)
	BIBS350-6	6	#10 - 350	5.86	2.32	2.50	5/16 (275)
	BIBS350-8	8	#10 - 350	7.68	2.32	2.50	5/16 (275)
	BIBS350-10	10	#10 - 350	9.50	2.32	2.50	5/16 (275)
	BIBS350-12	12	#10 - 350	11.32	2.32	2.50	5/16 (275)
	BIBS350-14	14	#10 - 350	13.14	2.32	2.50	5/16 (275)
	BIBS600-3	3	#4 - 600	4.00	2.38	2.75	3/8 (375)
	BIBS600-4	4	#4 - 600	5.28	2.38	2.75	3/8 (375)
	BIBS600-5	5	#4 - 600	6.56	2.38	2.75	3/8 (375)
	BIBS600-6	6	#4 - 600	7.84	2.38	2.75	3/8 (375)
	BIBS600-8	8	#4 - 600	10.41	2.38	2.75	3/8 (375)
	BIBS600-10	10	#4 - 600	12.97	2.38	2.75	3/8 (375)
	BIBS600-12	12	#4 - 600	15.53	2.38	2.75	3/8 (375)
	BIBS600-14	14	#4 - 600	18.09	2.38	2.75	3/8 (375)
	BIBS750-3*	3	#2 - 750	4.25	2.70	3.00	3/8 (375)
	BIBS750-4*	4	#2 - 750	5.63	2.70	3.00	3/8 (375)
	BIBS750-6*	6	#2 - 750	8.37	2.70	3.00	3/8 (375)
BIBS750-8*	8	#2 - 750	11.13	2.70	3.00	3/8 (375)	
BIBS750-10*	10	#2 - 750	13.87	2.70	3.00	3/8 (375)	
BIBS750-12*	12	#2 - 750	16.63	2.70	3.00	3/8 (375)	
BIBS750-14*	14	#2 - 750	19.37	2.70	3.00	3/8 (375)	

\*Not UL Listed

UNITAP™ connectors are rated for code conductor only.


## Mounting Version for UNITAP™ Connector Line

	Catalog #	# of Ports	Wire Range (AWG/kcmil)	Length	Width	Height	Hex Key (Torque in-lbs)
<b>BIBS-MT, BIBD-MT Mounting Version</b> <b>MULTI-PORT</b> <b>Single-Sided Entry or Double-Sided Entry</b> 	BIBS2/04MT	4	#14-2/0	3.95	1.31	1.38	3/16 (120)
	BIBS2/06MT	6	#14-2/0	5.29	1.31	1.38	3/16 (120)
	BIBS2/08MT	8	#14-2/0	6.64	1.31	1.38	3/16 (120)
	BIBS2/010MT	10	#14-2/0	7.98	1.31	1.38	3/16 (120)
	BIBS2/012MT	12	#14-2/0	9.33	1.31	1.38	3/16 (120)
	BIBS2504MT	4	#10-250	5.53	2.07	2.13	5/16 (275)
	BIBS2506MT	6	#10-250	7.40	2.07	2.13	5/16 (275)
	BIBS2508MT	8	#10-250	9.28	2.07	2.13	5/16 (275)
	BIBS25010MT	10	#10-250	11.16	2.07	2.13	5/16 (275)
	BIBS25012MT	12	#10-250	13.03	2.07	2.13	5/16 (275)
	BIBS3504MT	4	#10-350	5.61	2.32	2.50	5/16 (275)
	BIBS3506MT	6	#10-350	7.43	2.32	2.50	5/16 (275)
	BIBS3508MT	8	#10-350	9.25	2.32	2.50	5/16 (275)
	BIBS35010MT	10	#10-350	11.07	2.32	2.50	5/16 (275)
	BIBS35012MT	12	#10-350	12.89	2.32	2.50	5/16 (275)
	BIBS6004MT	4	#4-600	7.59	2.38	2.75	3/8 (375)
	BIBS6006MT	6	#4-600	10.16	2.38	2.75	3/8 (375)
	BIBS6008MT	8	#4-600	12.72	2.38	2.75	3/8 (375)
	BIBS60010MT	10	#4-600	15.28	2.38	2.75	3/8 (375)
	BIBS60012MT	12	#4-600	17.84	2.38	2.75	3/8 (375)
	BIBD2/04MT	4	#14-2/0	3.95	1.56	1.38	3/16 (120)
	BIBD2/06MT	6	#14-2/0	5.29	1.56	1.38	3/16 (120)
	BIBD2/08MT	8	#14-2/0	6.64	1.56	1.38	3/16 (120)
	BIBD2/010MT	10	#14-2/0	7.98	1.56	1.38	3/16 (120)
	BIBD2/012MT	12	#14-2/0	9.33	1.56	1.38	3/16 (120)
	BIBD2504MT	4	#10-250	5.53	2.64	2.13	5/16 (275)
	BIBD2506MT	6	#10-250	7.40	2.64	2.13	5/16 (275)
	BIBD2508MT	8	#10-250	9.28	2.64	2.13	5/16 (275)
	BIBD25010MT	10	#10-250	11.16	2.64	2.13	5/16 (275)
	BIBD25012MT	12	#10-250	13.03	2.64	2.13	5/16 (275)
	BIBD3504MT	4	#10-350	5.61	3.00	2.50	5/16 (275)
	BIBD3506MT	6	#10-350	7.43	3.00	2.50	5/16 (275)
	BIBD3508MT	8	#10-350	9.25	3.00	2.50	5/16 (275)
	BIBD35010MT	10	#10-350	11.07	3.00	2.50	5/16 (275)
	BIBD35012MT	12	#10-350	12.89	3.00	2.50	5/16 (275)
	BIBD6004MT	4	#4-600	7.59	3.00	2.75	3/8 (375)
	BIBD6006MT	6	#4-600	10.16	3.00	2.75	3/8 (375)
	BIBD6008MT	8	#4-600	12.72	3.00	2.75	3/8 (375)
	BIBD60010MT	10	#4-600	15.28	3.00	2.75	3/8 (375)
	BIBD60012MT	12	#4-600	17.84	3.00	2.75	3/8 (375)

UNITAP™ connectors are rated for code conductor only.



## UV-Rated Black UNITAP™ Connectors

	Catalog #	# of Ports	Wire Range (AWG/kcmil)	Length	Width	Height	Hex Key (Torque in-lbs)
<b>UV-Rated Black UNITAP™ MULTI-PORT</b> 	1PL42	2	#14 - 4	1.16	1.16	1.25	1/8 (45)
	1PL042	2	#14 - 4	1.16	1.50	1.25	1/8 (45)
	1PL2/02	2	#14 - 2/0	1.52	1.40	1.38	3/16 (120)
	1PL02/02	2	#14 - 2/0	1.52	1.56	1.38	3/16 (120)
	1PL2502	2	#10 - 250	2.03	2.07	2.13	5/16 (275)
	1PL02502	2	#10 - 250	2.03	2.64	2.13	5/16 (275)
	1PL3502	2	#10 - 350	2.22	2.32	2.50	5/16 (275)
	1PL6002	2	#4 - 600	2.72	2.38	2.75	3/8 (375)
	1PL06002	2	#4 - 600	2.72	3.00	2.75	3/8 (375)
	1PBS2	2	#14 - 2	2.38	0.75	1.22	5/32 (45)
	1PBS1/0	2	#14 - 1/0	2.91	0.91	1.38	3/16 (120)
	1PBS250	2	#10 - 250	4.01	1.19	2.10	5/16 (275)
	1PBS350	2	#10 - 350	4.63	1.34	2.35	5/16 (275)
	1PBS500	2	#6 - 500	5.00	1.62	2.62	3/8 (375)
	1PL43	3	#14 - 4	1.59	1.25	1.25	1/8 (45)
	1PL44	4	#14 - 4	2.03	1.25	1.25	1/8 (45)
	1PL2/03	3	#14 - 2/0	2.19	1.31	1.38	3/16 (120)
	1PL2503	3	#10 - 250	2.97	2.07	2.13	5/16 (275)
	1PLD43	3	#14 - 4	1.59	1.50	1.25	1/8 (45)
	1PLD44	4	#14 - 4	2.03	1.50	1.25	1/8 (45)
	1PLD2/02	2	#14 - 2/0	1.52	1.56	1.25	3/16 (120)
	1PLD2/03	3	#14 - 2/0	2.19	1.56	1.25	3/16 (120)
	1PLD2/04	4	#14 - 2/0	2.86	1.56	1.25	3/16 (120)
	1PLD2/06	6	#14 - 2/0	4.20	1.56	1.25	3/16 (120)
	1PLD2502	2	#10 - 250	2.03	2.64	2.13	5/16 (275)
	1PLD2503	3	#10 - 250	2.97	2.64	2.13	5/16 (275)
	1PLD2504	4	#10 - 250	3.91	2.64	2.13	5/16 (275)
	1PLD2506	6	#10 - 250	5.78	2.64	2.13	5/16 (275)
	1PLD3502	2	#10 - 350	2.22	3.00	2.50	5/16 (375)
	1PLD3503	3	#10 - 350	3.13	3.00	2.50	5/16 (375)
	1PLD3504	4	#10 - 350	4.04	3.00	2.50	5/16 (375)
	1PLD3506	6	#10 - 350	5.86	3.00	2.50	5/16 (375)
	1PLD3508	8	#10 - 350	7.68	3.00	2.50	5/16 (375)
	1PLD6002	2	#4 - 600	2.56	3.00	2.75	3/8 (375)
	1PLD6003	3	#4 - 600	3.77	3.00	2.75	3/8 (375)
	1PLD6004	4	#4 - 600	4.97	3.00	2.75	3/8 (375)
	1PLD6005	5	#4 - 600	6.17	3.00	2.75	3/8 (375)
	1PLD6006	6	#4 - 600	7.37	3.00	2.75	3/8 (375)
	1PLD6008	8	#4 - 600	9.78	3.00	2.75	3/8 (375)


UNITAP™ connectors are rated for code conductor only.





## Trust the BURNDY® Engineered System

The BURNDY® Engineered System of connectors and tools are always designed to work together and engineered to meet stringent, accepted quality standards.

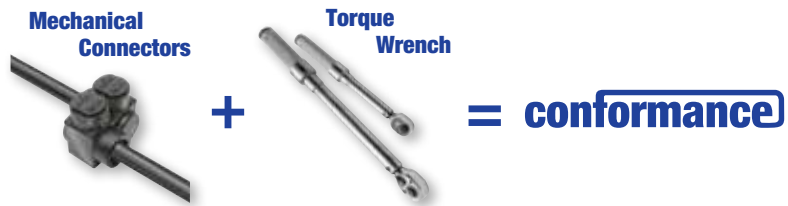

[www.burndy.com](http://www.burndy.com) | 1-800-346-4175



 **BURNDY®**