
## The Full Line...SNAP<sup>2</sup>IT<sup>®</sup> Connectors

## For the widest variety of 14/2 to 3/3 cables

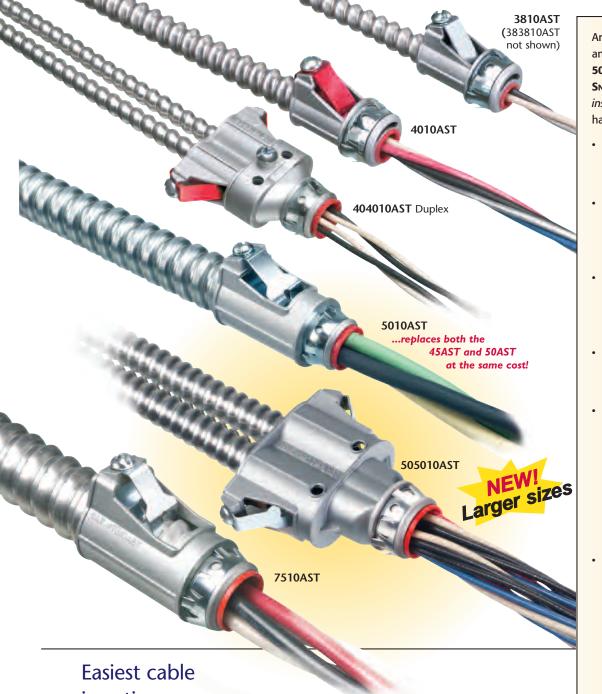

Arlington's **3810AST** and **4010AST** series and now the new, larger sizes: **5010AST**, **505010AST**, **7510AST SNAP<sup>2</sup>IT**\* fittings – are the *easiest to insert* snap-on connectors. And they handle the widest variety of cables!

- Easiest installation New and improved design delivers the easiest cable insertion.
- Widest total cable ranges Our Snap<sup>2</sup>lt<sup>®</sup> connector line accommodates cables from 14/2 to 3/3.
- Widest variety of cables
  For AC, MC, HCF, MC continuous
  corrugated aluminum cable and
  MCI-A cables (steel and aluminum).
- Super-secure installation The angled clip locks down on MC cable so there's no chance of pullout!
- Connector is removable, reusable From cable: Loosen the screw on top and remove.

From box: Slip screwdriver under notch in the Snap-Tite\* ring and twist.



 Fully assembled; ready to use

Easiest cable insertion... NO TOOLS! Secure hold.



ROYAL ELECTRIC SUPPLY

3233 W Hunting Park Avenue, Philadelphia PA 19132-1845 (800) 79-ROYAL (215) 221-1200 fax (215) 221-1201 advisors@royalelectric.com www.royalelectric.com

> WE GET IT 24/7 Emergency Material Access

## SNAP<sup>2</sup>IT<sup>®</sup> Connectors

## For the widest variety of 14/2 to 3/3 cables

| 3810AST   | ltem<br>No.                                | UPC/DCI/NAED<br>Mfg. #01 8997   | End<br>Stop<br>Dia. | Cable<br>Dia.             | Cable<br>Type   | Cable<br>Sizes   | Unit<br>Pkg | Std<br>Pkg |
|---|--|---|---------------------|---------------------------|---|--|-------------|------------|
| Top View<br>Clip holds cable tight<br>Note: Metal jacket should<br>never go through the end stop<br>4010AST<br>Exploded View - Components | 3810AST 00385<br>383810AST 10937<br>Duplex |   | .312                | .370<br>to<br>.490        | For steel and<br>aluminum:<br>MC/HCF<br>and MCI-A<br>AC/HCF   | 14/2 and 12/2<br>with and<br>without ground;<br>and<br>14/3 and 12/3   | 50          | 500        |
|   |  |   | .312                | (2)<br>.370<br>to<br>.490 |   |  | 25          | 100        |
| Screw holds clip permanently in place; —<br>loosen to remove cable<br>Angled, two-prong clip —<br>locks down on cable                     | 4010AST 40355                              |   | .400                | .405<br>to<br>.612        | For steel and<br>aluminum:<br>MC/HCF<br>and MCI-A<br>AC/HCF   | 14/3, 14/4,<br>12/2, 12/3, 12/4,<br>10/2, 10/3<br>and<br>3/8" flexible | 50          | 500        |
| Insulated throat  | 404010A<br>Duplex                          | ST 40533  | .400                | (2)<br>.405<br>to<br>.612 | Flexible metal<br>conduit<br>(regular and<br>reduced wall)  | metal conduit  | 25          | 100        |
| <b>7510AST</b><br>Back view<br>Angled,<br>heavy-duty<br>two-prong clip<br>holds large cables<br>securely in place                         | <b>5010AST</b><br>w/ 1/2"<br>KO            | /2"<br>.540 .590 For steel and<br>aluminum:<br>.920 MC/HCF<br>and MCI-A |                     | MC/HCF<br>and MCI-A       | 12/8 to 6/3<br>NEWI<br>Large size   | 25   | 250         |            |
|   | 505010A<br>Duplex                          | <b>ST</b> 50720   | .540                | (2)<br>.590<br>to<br>.920 | AC/HCF<br>5010AST only:<br>Flexible metal<br>conduit<br>(regular and<br>reduced wall)                                     | 12/8 to 6/3  | 25          | 25         |
| <b>Arlington</b>  | <b>7510AST</b><br>w/ 3/4" K                |   | .766                | .895<br>to<br>1.110       | For steel and<br>aluminum:<br>MC/HCF<br>and MCI-A<br>AC/HCF<br>Flexible metal<br>conduit<br>(regular and<br>reduced wall) | 6/4<br>to<br>3/3<br>3/4" flexible<br>metal conduit                     | 25          | 25         |
| 1 Stauffer Industrial Park<br>Scranton, PA 18517<br>800/233.4717  | (YL) (\$                                   |   |                     |                           | Distributed by  |  |             |            |

www.arlnew.com/snap2it 3810-7510AST REV10/09 25M

Fax 570/562.0646 www.aifittings.com