

Provolt™ Series Passive Infrared (PIR) Occupancy Sensors



Light Pipe



DESCRIPTION

The Leviton Provolt™ Series combines line voltage occupancy sensors and photocells into a self-contained unit. The integrated design alleviates the need for separate power pack and occupancy sensor wiring making it a low-cost, efficient energy solution for new construction and retrofits. For true daylight harvesting applications, integrated photocells provide consistent daylight design levels by actively switching the connected load(s) ON and OFF in response to available natural light to maximize energy savings. Vacancy timers continually analyze and adjust to changing conditions using the latest microprocessor-based technology to optimize performance. Auto-ON/auto-OFF automatically turns lights ON and keeps them ON when occupancy is detected and automatically turns lights OFF when the space is vacant or unoccupied. Wire terminals allow for simple connection to a line-voltage circuit and are ideal for existing buildings with limited access to wiring and new construction.

APPLICATIONS

- Daylight harvesting
- Meets energy code requirements for CA Title 24
- Auto-ON/auto-OFF
- Manual-ON/auto-OFF

FEATURES

- Uses industry-exclusive digital (4 element) PIR circuitry for fewer false triggers from unwanted sources such as HVAC systems
- A Fresnel lens establishes dozens of detection zones requiring the heat source to move from one zone to another to trigger the sensor
- Auto-adapting: time delay and sensitivity are continually adjusted to occupancy pattern of use
- Configurable for manual- ON/auto-OFF or auto-ON/auto-OFF

- Vacancy Sensing Time Outs:
 - Delayed OFF timer: the sensor will turn lights OFF if no motion is detected after a specified time
 - Exclusive walk-through feature: provides increased energy savings by not leaving the lights ON for an extended period after only momentary occupancy
 - False Detection Timer: (M/T) the PIR scans for movement and shuts lights off after 31 minutes preventing false triggers from HVAC systems
- Output short circuit protection
- Industry-exclusive self-configuring local manual switch input: momentary or maintained switches are supported
- Presentation mode feature for slide or film presentations allows push buttons to turn lights OFF and keep them OFF while the room is occupied
- Adjustable time delay: 30s, 5min, 10min, 20min, 30min
- Test mode for simplified commissioning
- Manual Switch and Emergency Override are Class 1 and Class 2 circuits. Class 2 circuits provided for flexibility.
- Industry-exclusive “fail-safe” circuitry: in the event of product failure, Return-to-Closed feature causes the relay to default ON which eliminates life safety concerns
- Industry-exclusive H.I.S. (High Inrush Stability) technology designed to handle today’s high in-rush electronic ballast loads and offer matched durability and service



PRODUCT DATA

FEATURES


- Robust and reliable mechanically held 8A latching relay provides dependability and robust performance for all load types and provides energy savings over electronically held relays
- Field of view: units from 450 to 1,500 square feet available
- Lenses are easily replaceable and color-coded blue (high-density) and red (mid-range) for contractors and end-users to easily identify lenses from the ground
- Visual LED indicators for all states:
 - Red—blinks when infrared is detecting motion and during photocell manual calibration; solid during device malfunction
 - Yellow—blinks during test mode; solid with emergency/BMS input
 - Blue—blinking light indicates photocell override

RATINGS AND TESTING


- Factory-calibrated, zero-crossing circuitry for extended life of the relay
- Tested to exceed 1 million switching cycles under standard loads
- Multiple compliance and regulatory UL testing -consult factory for details
- Passed rigorous NEMA 410 testing for electronic ballast rating
- BMS Input/Emergency Override: UL 924 listed for emergency and egress lighting control

PHOTOCELL OPERATION


Open Loop - Angled Light Pipe



Note: Long side of angled light pipe must face toward natural light source (window)

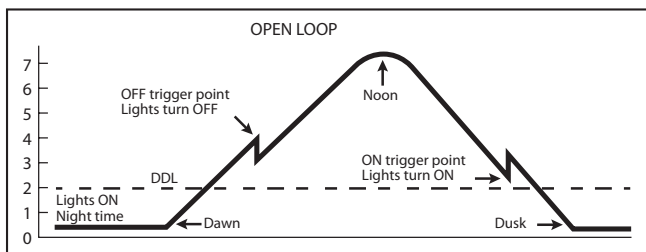

Closed Loop - Flat Light Pipe

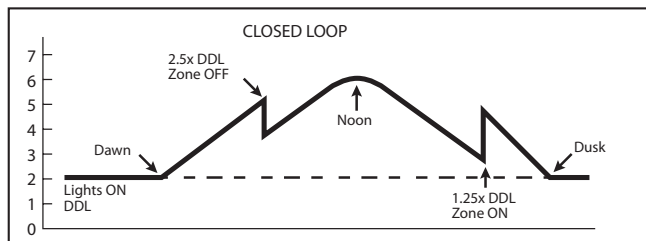

Photocell Features


- Daylight harvesting applications:
 - Auto calibration (automatic daylight calibration): photocell intelligently measures light levels to determine optimal daylight design levels for closed loop applications
 - Closed Loop: photocell detects total photometric light from daylight or electric sources in the space
- Open Loop: photocell detects daylight or electric light only; requires manual calibration
- Adjustable Daylight Design Levels: Normal (OFF), Manual (ON/OFF) and Auto Calibration
- Blue blinking light indicates photocell override
- Integrated photocell tested to less than 1 Fc accuracy
- Open and closed loop photocell included

INSTALLATION


- Easy installation into junction boxes with Leviton-exclusive screw guides, coasters and terminal blocks
- Front cover snaps on and off for ease of installation

PHOTOCELL PLACEMENT*

Open Loop Application - Angled Light Pipe

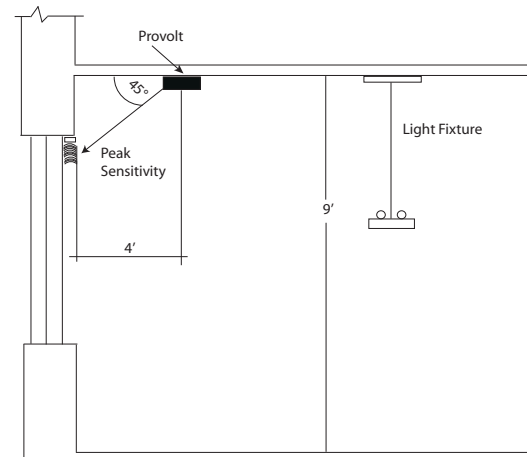

Closed Loop Application - Flat Light Pipe

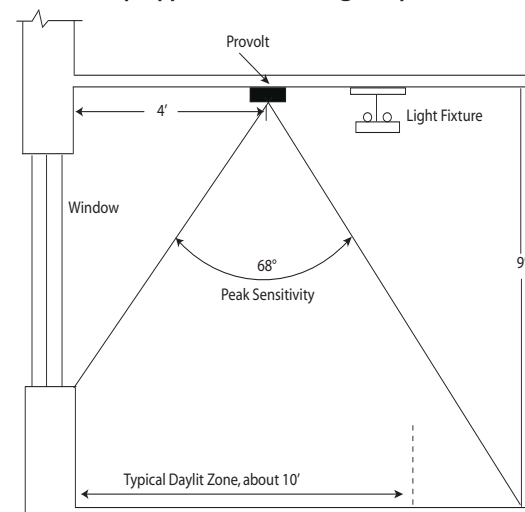


*May require more than one occupancy sensor for total room coverage


PRODUCT DATA




FIELD OF VIEWS

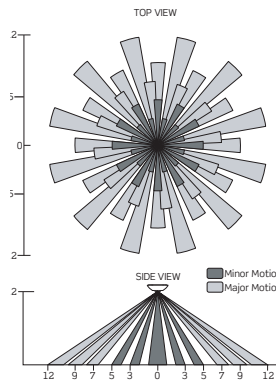

ODC04-IDW
(High Density Lens - Blue)

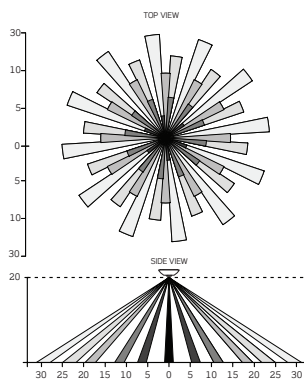


Mid-Range Lens (mounting up to 20 feet, included with all PIR and Multi-Tech Models)

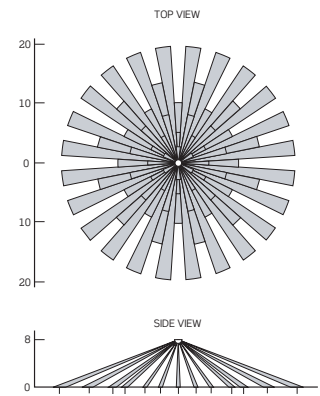


ODC15-IDW
(Extended Range Lens - Black)

DIMENSIONS

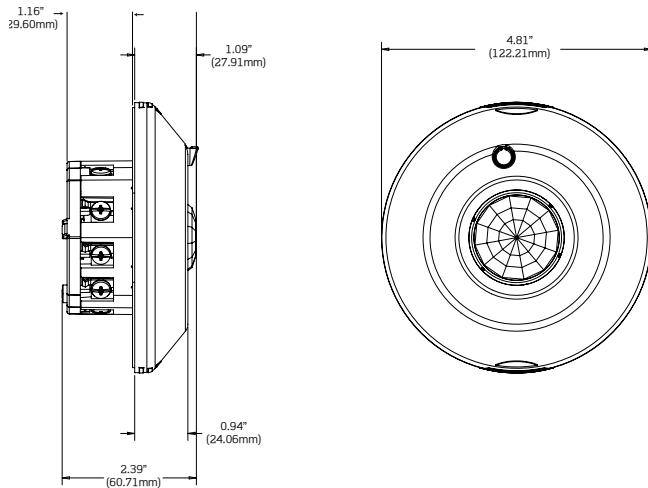

INSTALLATION

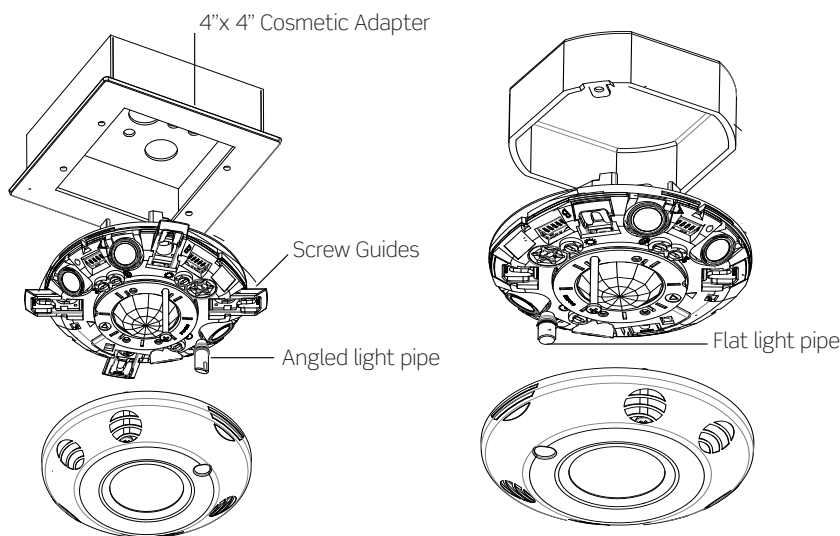

Sensors conveniently mount to a standard 4" x 4" square or octagon electrical box per NEC standards.

Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 **tech line** 800-824-3005 **fax** 800-832-9538
©2016 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Provolt™ Series PIR Occupancy Sensors

PRODUCT DATA

SPECIFICATIONS

ELECTRICAL			
Input Voltage	120V, 50/60Hz	230V, 50/60Hz	277V, 50/60Hz
Load Rating	8A, Electronic Ballast, 800W/VA, Tungsten, Ballast, 1/4 HP Motor	6A/6AX, Electronic Ballast, Magnetic Ballast, 1200W/VA, 1/3 HP Motor	5A, Electronic Ballast, 1200VA, 1/3 HP Motor
Current Consumption	60-30ma		
ENVIRONMENTAL			
Operating Temperature	32-104° F (0-40° C)		
Storage Temperature	15-160° F (-26-71° C)		
Relative Humidity	0-90% non-condensing		
OTHER			
Listings	Meets energy code requirements for CA Title 24, UL 773A (Occupancy Standard), UL 924 (Emergency Equipment), cUL Listed, CE compliant, NOM Certified, RoHS compliant, NY LLC48 compliant		
Warranty	5-Year Limited Warranty		

ORDERING INFORMATION

CAT. NO.	DESCRIPTION
ODC04-IDW	Line Voltage, Ceiling, PIR Sensor 450sqft, 120-277V, high-density lens installed, open and closed loop photo cell included, mid-range lens included, meets energy code requirements for CA Title 24
ODC15-IDW	Line Voltage, Ceiling, PIR Sensor 1,500sqft, 120-277V, extended range L lens installed, open and closed loop photo cell included, mid-range lens included, meets energy code requirements for CA Title 24

Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 **tel** 800-323-8920 **fax** 800-832-9538 **tech line** (8:30AM-7:00PM ET Mon-Fri) 800-824-3005

Leviton Manufacturing Co., Inc. Energy Management, Controls and Automation

20497 SW Teton Avenue, Tualatin, OR 97062 **tel** 800-736-6682 **fax** 503-404-5594 **tech line** (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

Visit our Website at: www.leviton.com/occupancysensors

©2016 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.